


# MHT LIGHTING

PoE FIXTURE

Line Voltage Fixture



## DIMENSIONS

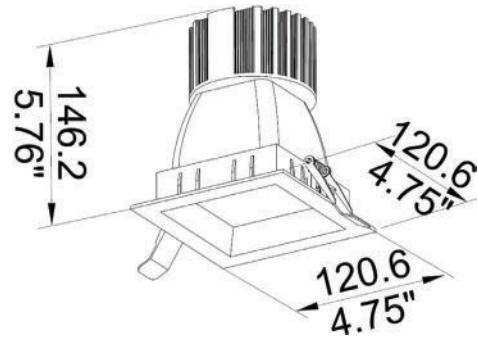

## MHT DL-4-S Series

### FEATURES

- PoE Enabled that works with Inspextor
- 0-10V Line Voltage Available

### GENERAL INFORMATION


Applications	Airports, Corporate Campuses, Data Centers, Retail, and Health-care Facilities
Warranty	5-year Limited Warranty
Construction	Lightweight Die-cast Aluminum Housing with Stainless Steel Spring Clips Lens: White Polycarbonate Beam Angle: 70°
Certifications	  

### PRODUCT DATA

Electrical	Non-Integrated PoE Low Voltage Driver Node or 0-10V LED Driver
Mounting	Recessed ceiling mount
Lumens	1,000 - 2,000 Lumens
Max Input Power	10/15/20W
CRI	> 80
CCT	3000K/3500K/4000K/5000K
L70 Lifetime	> 50,000 Hours
Rated Lifespan	> 60,000 Hours
Dimensions	4.75" x 4.75" x 5.76"

### PHOTOMETRICS

MHTi-DL-SC-4-S-15E  
Luminaire Output: 1,543 lumens, 15 Watts

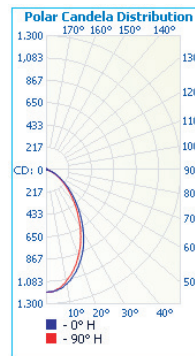

Illuminance at a Distance			
Center Beam fc		Beam Width	
1.5ft	529 fc	2.0 ft	2.0 ft
3.0ft	132 fc	4.0 ft	4.0 ft
4.5ft	58.8 fc	6.0 ft	6.1 ft
6.0ft	33.1 fc	8.0 ft	8.1 ft
7.5ft	21.2 fc	10.0 ft	10.1 ft
9.0ft	14.7 fc	12.1 ft	12.1 ft

■ Vert. Spread: 67.6°  
■ Horiz. Spread: 67.9°

### FIXTURE PERFORMANCE

Model	Max Wattage	Lumens/Watt
MHT-DL-4-S-10W	10W	100 lm/W
MHT-DL-4-S-15W	15W	100 lm/W
MHT-DL-4-S-20W	20W	100 lm/W

### ORDERING INFO: Sample Code - MHTi-DL-SC-4-9E-3K

Series	Size & Wattage	Color Temperatures	Options
MHT-DL-4-S			
PoE: MHTi-DL-4-S-SC LV: MHTL-DL-4-S	10W - 4" - Square 10W (PoE/LV) 15W - 4" - Square 15W (PoE/LV) 20W - 4" - Square 20W (PoE/LV)	3K - 3000K 35K - 3500K 4K - 4000K 5K - 5000K	(Blank) - Standard in White Trim

