

MHT LIGHTING

PoE FIXTURE

Line Voltage Fixture

VNT Series

LED WALL VANITY Series

FEATURES

- PoE Enabled that works with Inspextor
- 0-10V Line Voltage Available
- LED Wall Mounted Vanity LED Fixture

GENERAL INFORMATION

Applications Coporate Campuses, Education, Retail, and Healthcare Facilities

Warranty 5-year Limited Warranty

Construction Extruded Aluminum Construction Mounted on a Chrome Finished Steel Back Box with a Universal Junction Box Mounting Plate
Lens: Clear and White Acrylic

Certifications



PRODUCT DATA

Electrical Integrated PoE Low Voltage Driver Node or 0-10V LED Driver .

Mounting Wall mounted

Lumens 2,000 Lumens

Max Input Power 20W

CRI > 85

CCT 2700K/3000K/3500K/4000K


L70 Lifetime > 50,000 Hours

Rated Lifespan > 50,000 Hours


Dimensions Chrome Box: 6.8" x 4.25" x 1.45"
Overall: 24" x 4.25" x 3"



DIMENSIONS

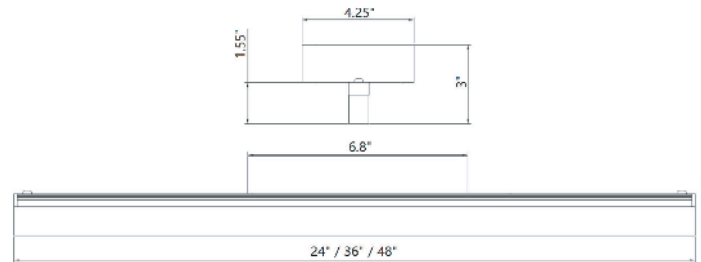

PHOTOMETRICS



Illuminance at a Distance	
Center Beam fc	Beam Width
1.5ft 84.4 fc	5.2 ft
3.0ft 21.1 fc	10.4 ft
4.5ft 9.38 fc	15.6 ft
6.0ft 5.27 fc	20.7 ft
7.5ft 3.38 fc	25.9 ft
9.0ft 2.34 fc	31.1 ft
■ Horiz. Spread: 119.9°	

FIXTURE PERFORMANCE

Model	Max Wattage	Lumens/Watt
MHT-VNT-24-20W	20W	100 lm/W

ORDERING INFO: Sample Code - MHTi-VNT-SC-24-20E-27K

MHT Technologies

Series	Size & Wattage	Color Temperatures	Options
MHT-VNT			
PoE: MHTi-VNT-SC LV: MHTL-VNT	24-20W (PoE/LV)	27K - 2700K 3K - 3000K 35K - 3500K 4K - 4000K	(Blank) - Standard in Chrome